


WARP KNITTING
经编机

MT 76/1/32 S

MT 84/1/40 S

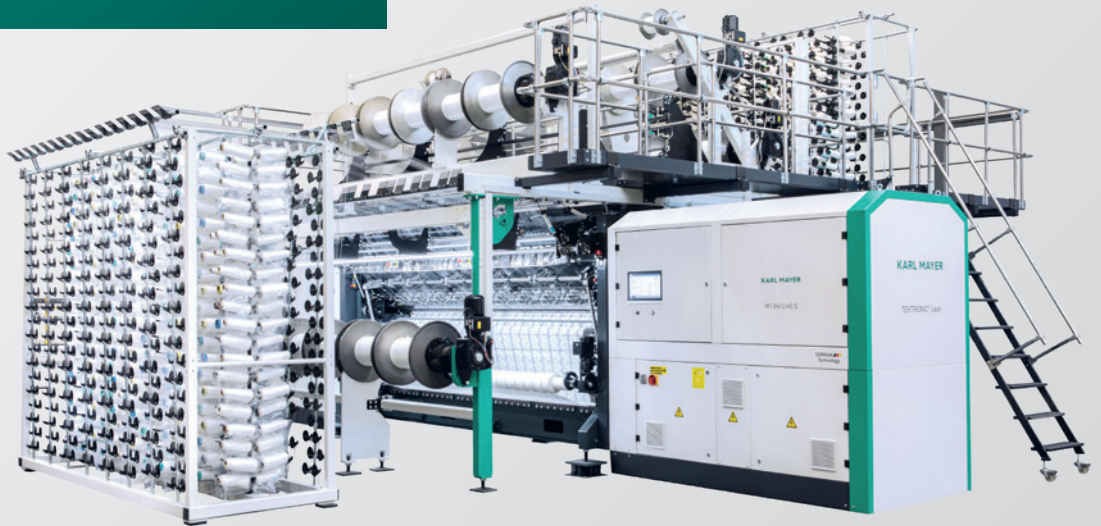

New TEXTRONIC® Multibar Jacquard Raschel machine for the production of high-quality elastic and rigid lace

全新生产高品质弹力和无弹花边的特克斯簇尼克®多梳贾卡拉舍尔经编机

Your benefit

- Two split Jacquard bars and one guide bar make stitch forming.
- Two guide bars at back side able to make counter-lapping.
- PB2-11 can be replaced by GB1.
- Super multi-functional and flexible machine.
- Able to produce exceptionally light, transparent and strong ground fabric.
- Better price-performance ratio.
- Short set-up times and easy handling.
- High operation reliability and low maintenance.

您的优势

- 2把分离式贾卡梳栉和1把地梳成圈
- 后面2把地梳可编织对拉网
- 地梳GB1可替换花梳PB2-11
- 机器功能丰富, 运用灵活
- 可生产轻盈、通透、高强度底网织物
- 更高性价比
- 设置时间短, 操作简单
- 运行稳定性高和维护成本低

MT 76/1/32 S – MT 84/1/40 S

Technical data

技术参数

MT 76/1/32 S	Stitch forming 成圈				Inlay lapping 衬纬											
	Pattern bars 花梳				Fall plate 压纱板	Jacquard bar 贾卡梳	Ground bar 地梳	Pattern bars 花梳				Ground bars 地梳				
Shog line 横移线	1	2	3	4		5-6	7	8	9	10	11	12	13	14		
Patterning 花梳数	8	16	24	32				40	48	56	64	72				
Option 选择配置	GB1						PB 45-52									

MT 84/1/40 S	Stitch forming 成圈				Inlay lapping 衬纬											
	Pattern bars 花梳				Fall plate 压纱板	Jacquard bar 贾卡梳	Ground bar 地梳	Pattern bars 花梳				Ground bars 地梳				
Shog line 横移线	1	2	3	4		5-6	7	8	9	10	11	12	13	14		
Patterning 花梳数	10	20	30	40				48	56	64	72	80				
Option 选择配置	GB1						PB 45-52									

Working width / Gauge

340 cm = 134 inches
E 24 / E 28

Yarn let-off device

Five electronically controlled yarn let-off gears for ground guide bars and Jacquard bars; six position optional

Pattern device EL

Electronic guide bar control: ground guide bars and pattern guide bars (string bars)

KAMCOS®2

(KARL MAYER COMMAND SYSTEM)

Operator interface to configure, control and adjust the electronic functionality of the machine

Fabric take-up

Electronically regulated fabric take-up, driven by geared motor, consisting of four rollers covered with black grip tape

Batching device

Batching device No. 13d integrated, centrally driven, max. batch diameter: 762 mm (30")
Batching device No. 34F optional

工作门幅/机号

340 cm = 134英寸
E 24 / E 28

送经机构

5套电子送经装置控制地梳和贾卡梳; 可选配6套系统

EL提花机构

电子横移系统控制地梳, 贾卡梳和花梳 (钢丝花梳)

卡迈酷斯®2 (卡尔迈耶控制系统)

操作界面, 用于设置、控制和调节机器的电控部分功能

织物牵拉机构

电子控制的织物牵拉, 通过电机传动, 由4个包覆黑色包布的罗拉组成

卷取机构

13d卷取, 轴心传动, 最大卷装直径: 762 mm (30英寸);
可选配34F落地卷取机构

Total width 宽度
8900 mm
Total depth 纵深
9900 mm
Total height 高度
4610 mm

